


过渡接头 ADAPTER

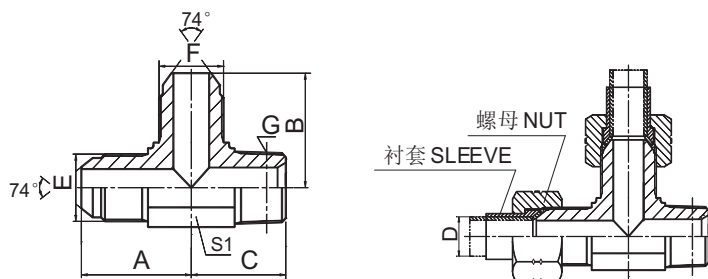

JIC 外螺纹 / JIC 外螺纹 / 英锥管外螺纹
JIC MALE / JIC MALE / BSPT MALE

AJJT-SP

代 号 PART NO.	螺 纹 THREAD			尺 寸 DIMENSIONS						
	E	F	G			A	B	C	S1	
AJJT-04-04-02SP	7/16"X20	7/16"X20	R1/8"X28			24.5	24.5	21	11	
AJJT-04SP	7/16"X20	7/16"X20	R1/4"X19			26.6	26.6	25.5	14	
AJJT-04-04-06SP	7/16"X20	7/16"X20	R3/8"X19			27.5	27.5	28	16	
AJJT-06-06-04SP	9/16"X18	9/16"X18	R1/4"X19			26.9	26.9	25.5	14	
AJJT-06SP	9/16"X18	9/16"X18	R3/8"X19			28.5	28.5	28.5	16	
AJJT-08-08-06SP	3/4"X16	3/4"X16	R3/8"X19			32	32	30.5	19	
AJJT-08SP	3/4"X16	3/4"X16	R1/2"X14			34.8	34.8	36	22	
AJJT-10-10-08SP	7/8"X14	7/8"X14	R1/2"X14			37.8	37.8	36	22	
AJJT-12SP	1.1/16"X12	1.1/16"X12	R3/4"X14			44.2	44.2	43.5	27	
AJJT-16SP	1.5/16"X12	1.5/16"X12	R1"X11			49	49	50	33	
AJJT-20SP	1.5/8"X12	1.5/8"X12	R1.1/4"X11			55.5	55.5	56.5	41	
AJJT-24SP	1.7/8"X12	1.7/8"X12	R1.1/2"X11			62.5	62.5	62.5	48	

注：螺母及衬套需另行订货。管子直径 D 为公制时，配用螺母及衬套分别选用 NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用 NB200、NB300。 Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.